



| | ESP32 Pin | | JTAG | | DevKitC | | Wiring |
|--------|-----------|--------------|------|-------|---------|-------|--------|
| Signal | Name | Pin # | Name | Pin # | Name | Pin # | Color |
| Vcc | 3.3V | 1,2,3,37, 19 | 3.3V | 1 | GND | J2.1 | - |
| Rst | CHIP_PU | 9 | SRST | 3 | EN | J2.2 | Black |
| Gnd | GND | EP | GND | 4 | GND | J2.14 | Blue |
| TDI | GPIO12 | 18 | TDI | 5 | IO12 | J2.13 | Green |
| TMS | GPIO14 | 17 | TMS | 7 | IO14 | J2.12 | Orange |
| TCK | GPIO13 | 20 | TCK | 9 | IO13 | J2.15 | Yellow |
| TDO | GPIO15 | 21 | TDO | 13 | IO15 | J3.16 | Grey |

(7/26/17)

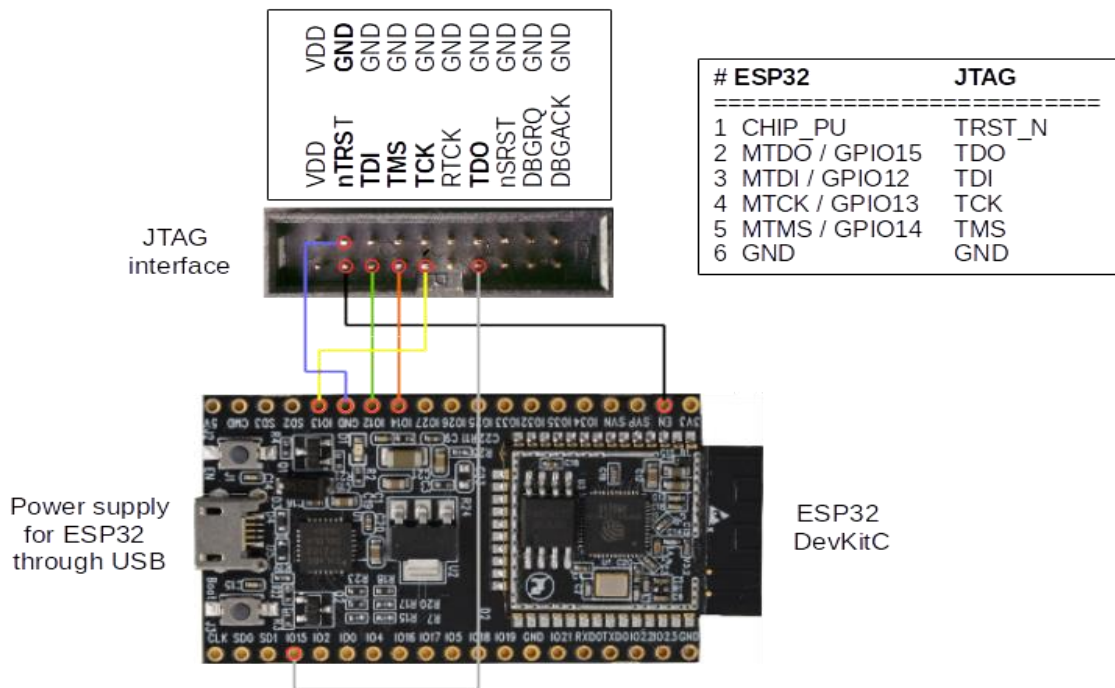

Connection of JTAG interface to ESP32 DevKitC

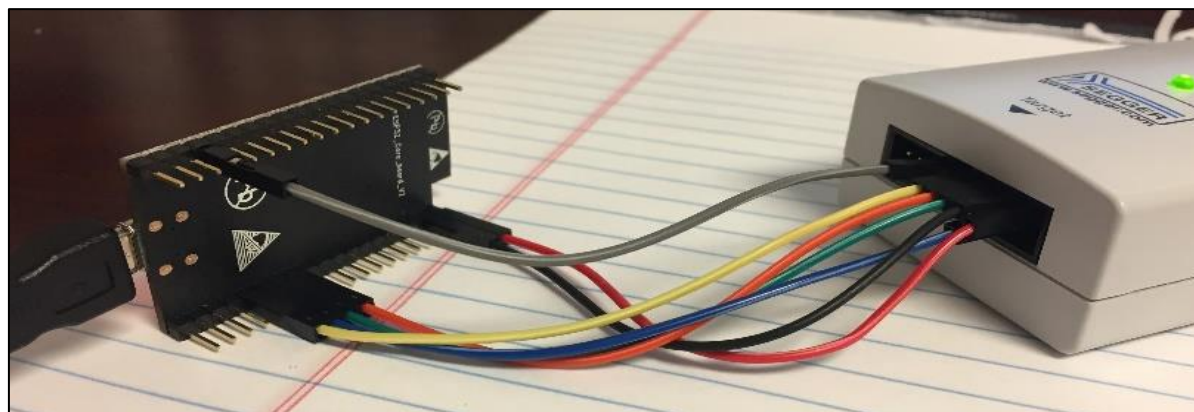

Example Connection to ESP32 DevKitC